


KNUCKLE COUPLER INSTALLATION

- Remove Hook & Loop coupler.
- Clip tab "A" from end of tongue and file smooth.
- Attach USA knuckle coupler "B" with #4 screw (C) provided.

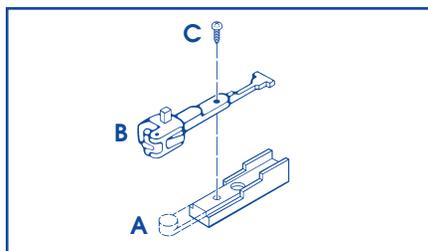

SERVICING

This product is built with pride by USA Trains and is covered by a limited warranty. (See limited warranty terms). Please follow these instructions carefully before returning:

1. Return caboose in its original blue/red box with the proper foam inserts and then pack the original box in a proper shipping carton so it is well protected in shipment. The package must be fully insured and prepaid. USA Trains is not responsible for damage or loss during shipment.
2. Include a note explaining the problem and servicing you need performed. Be sure to include your name, street address, (NO P.O. BOXES PLEASE) City, State, Country (if outside U.S.A) and zip code along with a daytime phone number including area code. If the service is not covered by warranty, a reasonable service fee will be charged. For any caboose to be returned outside the continental U.S.A., please include \$20.00 U.S. currency to cover return postage. Any cabooses returned to customers in the continental U.S.A. will be pre-paid by USA Trains.
3. Ship your item to:

USA TRAINS
662 CROSS STREET
MALDEN, MA. 02148


LIMITED ONE YEAR WARRANTY

This USA Trains caboose is warranted for one year from the date of purchase against defects in material or workmanship. We will repair or replace (at our option) the defective part without charge for parts or labor within one year of the original date of purchase. This warranty does not cover items that have been abused or damaged by careless handling or improper operation such as a train derailment, modification or repair by non-factory technicians. Parts that "wear out" due to excessive use are also not covered under warranty. USA Trains reserves the right to determine "excessive use". Transportation costs incurred by the customer are not covered under this warranty.



USA TRAINS

EXTENDED VISION CABOOSE INSTRUCTIONS

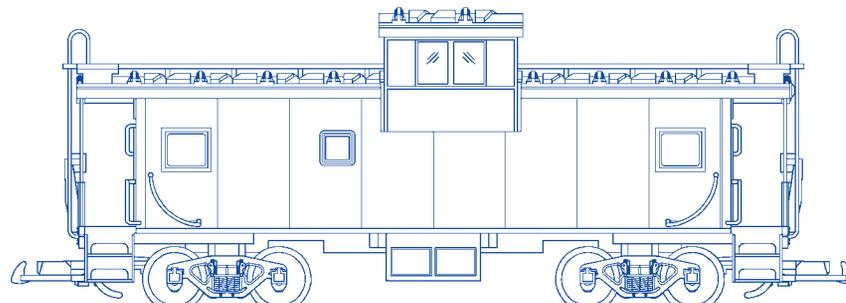

USA TRAINS
662 CROSS STREET
MALDEN, MA 02148, USA
www.usatrains.com
781-322-6084





Dear Customer,

Congratulations on your purchase of this highly detailed, high quality G scale caboose. This unit is equipped with a rechargeable battery circuit which will allow the rear ETD light to remain illuminated while the caboose remains stopped in your freight yard. This feature is unique to

USA Trains and shows that we are committed to providing you with the best possible product at a reasonable price.

We thank you for your support and hope you enjoy our products.

Happy Railroading
USA TRAINS

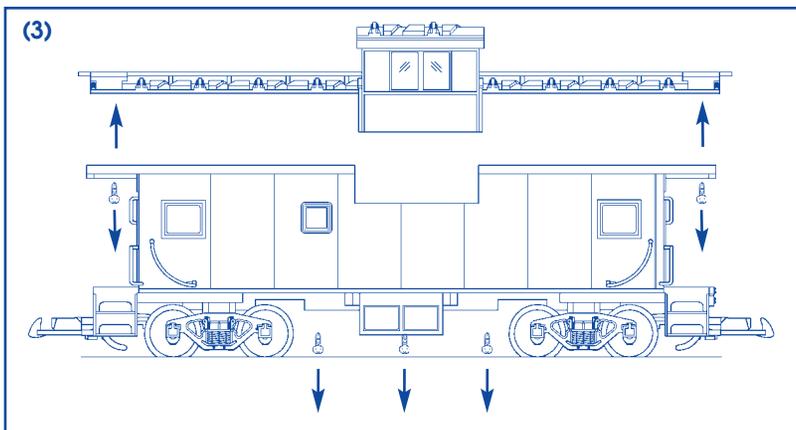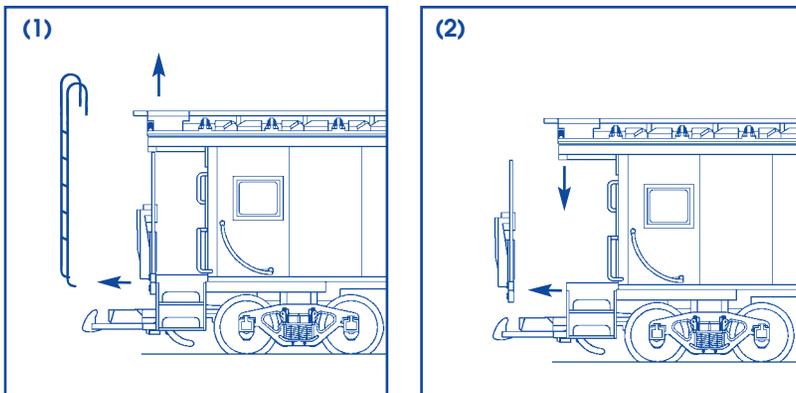

RECHARGEABLE BATTERY INSTRUCTIONS

Rechargeable battery installation is necessary for ETD to flash without track power.

- (1) Slide bottom of roof ladder away from caboose and then push the ladder up so it detaches from catwalk.
- (2) Grab end of platform (both ends) and slide away from caboose so it is slightly detached from caboose. Slide complete handrail assembly down so handrails detach from the roof.
- (3) Remove the three screws underneath caboose. Remove the two screws from underside of roof on each end. A Chapman wrench set is recommended for this due to the angle at which the screws must be removed. Drop down the roof panels to access roof screws on each end of caboose remove screws and lift roof off.
- (4) Open battery compartment on inside of caboose and install a 9 volt nicad rechargeable battery. Make sure (+) and (-) are correctly matched.
- (5) Reassemble caboose - make sure to put the handrails in roof first and then slide handrail assembly back on to caboose underframe.
NOTE: Roof will only fit on one way with rear light toward rear of caboose. Do not force roof on - it is keyed and should fit on without difficulty.
- (6) Use the three position switch on the bottom of the caboose to select your light operation.

THREE POSITION SWITCH

ALL LIGHTS ON	ALL LIGHTS OFF	REAR LIGHT ON
Interior lights and rear ETD light on from track power		rear ETD light only from battery power

RECHARGEABLE BATTERY

The battery must be charged in an external battery charger for 12 hours before installation in caboose.

NOTE: RECHARGEABLE BATTERY INSTALLATION IS NECESSARY FOR ETD LIGHT TO STAY ON.